


# Trayforma Performance PET

For conventional and microwave oven use

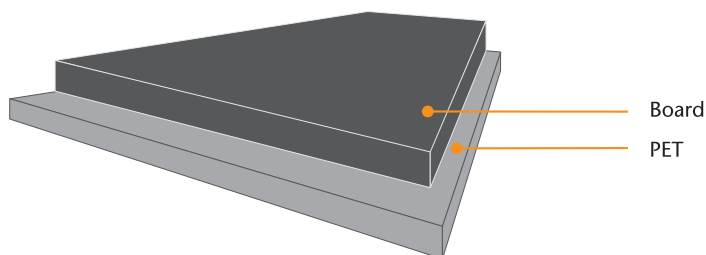

ISO 9001

## Specifications for Trayforma Performance PET:

Property/Unit	190+40	230+40	290+40	310+40	350+40	390+40	Standards
<b>PET coated board:</b>							
Grammage, g/m <sup>2</sup>	230	270	330	350	390	430	ISO 536
PET reverse, g/m <sup>2</sup>	40	40	40	40	40	40	Mill method
Thickness, μm	270	310	405	435	465	555	ISO 534
<b>Baseboard:</b>							
Grammage, g/m <sup>2</sup>	190	230	290	310	350	390	ISO 536
Bending resistance L&W 15° MD, mN	90	150	330	400	560	770	ISO 2493
Bending resistance L&W 15° CD, mN	30	55	115	130	190	280	
Moisture, %	9.5	9.5	9.5	9.5	9.5	9.5	ISO 287
Brightness D65/10°, Top	85	85	85	85	85	85	ISO 2471-2
Surface Smoothness, Bendtsen, ml/min, Top	350	350	450	450	600	1000	ISO 8791-2

PET available white or black

For dual ovenable use

All properties according to Imatra and Karhula Mills' measurements.

Test climate 23°C/50% RH (According to ISO 187).

In order to verify, reel/pallet average shall be based on 5 single measurements randomly sampled within the reel/pallet. These averages will be for at least 19 of 20 reels/pallets within the specification limits.

Imatra Mills have certified FSC and PEFC Chain-of-Custody (CoC) systems as well as certified hygiene management system.

FSC: Certificate registration code SA-COC-001548 and SA-CW-001548  
PEFC: Certificate registration no. 46786-2009-AE-FIN-FINAS

For more information contact your local sales office.